



4617 South Taylor Drive  
 Sheboygan, WI 53081 | USA  
 Toll-Free 1-800-558-7596  
 (920) 694-4800 | (920) 694-4801 Fax  
 service@torginol.com | www.torginol.com

# Product Data Sheet



## ColorGranules™ High Purity Color-Coated Quartz

For use in seamless, resin-based flooring systems

For more information, please visit our website at: [www.torginol.com](http://www.torginol.com)

### DESCRIPTION

**Product Name:**

Decorative Flooring Aggregate  
 Trade Name: ColorGranules™

**Manufacturer:**

Torginol, Inc.  
 4617 South Taylor Drive  
 Sheboygan, WI 53081 USA  
 (800) 558-7596 toll-free  
 (920) 694-4800 telephone  
 (920) 694-4801 facsimile  
 www.torginol.com  
 service@torginol.com

Torginol ColorGranules™, also known as colored quartz or aggregate, are composed of the finest uniformly shaped and sized quartz granules on Earth. This unique product is brilliantly color-coated with an advanced resin system and high-quality colorfast pigments to provide optimal durability and extreme performance in the most demanding environments. In addition to their superior resilience to harsh chemicals and UV rays, ColorGranules™ can be applied to achieve many different textures to minimize slip and fall injuries.

**ColorGranules™ Advantages:**

- Superior colorfastness / UV stability
- Extreme abrasion resistance
- Excellent chemical resistance
- Advanced color-coating chemistry
- Optimal grain shape and size uniformity
- Perfect for heavy-duty environments
- Outstanding slip-resistance qualities
- Extraordinary resilience
- Customizable to compliment any décor
- Lab tested resin system compatibility
- Custom color-matching available
- Unlimited custom-blending options
- Fast turnaround times
- Custom packaging & labeling options
- No minimum order quantities
- Over 60 in-stock color-styles
- Competitive pricing
- Extreme sales & marketing support
- Fast & friendly customer service


### 40-S GRADE

**40-S Grade:**

Grain Size: 40 mesh  
 Grain Shape: Spherical  
 Typical Application: Broadcast

**Size Distribution:**

U.S.A. Sieve Analysis ASTM C136-06

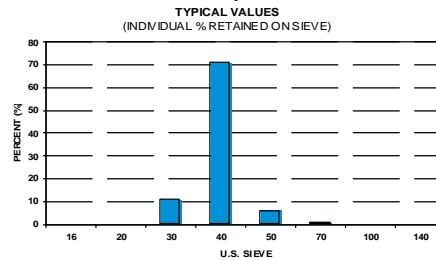


### 25-A GRADE

**25-A Grade:**

Grain Size: 25 mesh  
 Grain Shape: Angular  
 Typical Application: Trowel

**Size Distribution:**

U.S.A. Sieve Analysis ASTM C136-06

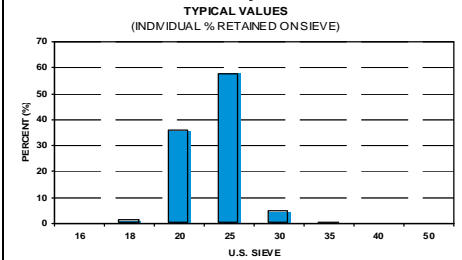

### PHYSICAL PROPERTIES

**Hardness:**

Mohs Scale of Mineral Hardness  
 Mohs Hardness 6.5 - 7

**Bulk Density:**

Aggregate Unit Weight ASTM C29  
 lbs/ft³ (packed) 90 - 105

**Specific Gravity:**

Relative Density ASTM C128-07a  
 Value 2.65

**Moisture Content:**

Evaporable Moisture ASTM C566-97  
 Moisture Content < 0.05%

**Color:**

Color Tolerance ASTM D2244  
 Spectrophotometer ΔE < 1.0

**Colorfastness / UV Stability:**

Xenon Arc Light ASTM G155  
 1,000 hours Pass

**Weatherability:**

Xenon Arc Light ASTM G155  
 1,000 hours Pass

**Melting Point:**

Degrees Fahrenheit 3,100°F

### CHEMICAL ANALYSIS, %

**Chemical**

SiO <sub>2</sub> (Silicon Dioxide)	99.800
Al <sub>2</sub> O <sub>3</sub> (Aluminum Oxide)	0.040
Fe <sub>2</sub> O <sub>3</sub> (Iron Oxide)	0.015
TiO <sub>2</sub> (Titanium Dioxide)	< 0.010
CaO (Calcium Oxide)	< 0.010
MgO (Magnesium Oxide)	< 0.010
Na <sub>2</sub> O (Sodium Oxide)	< 0.010
K <sub>2</sub> O (Potassium Oxide)	< 0.010

### CHEMICAL RESISTANCE

Liquid immersion for 18 hours in each chemical

**Chemical**

Aluminum Sulfate [25%]	None
Ammonium Hydroxide [28%]	None
Chlorine Bleach [15%]	None
Chromic Acid [82%]	None
Hydrochloric Acid [100%]	None
Industrial Detergent [50%]	None
Mineral Spirits [100%]	None
Muratic Acid [100%]	None
Nitric Acid [70%]	None
Sodium Carbonate [40%]	None
Sodium Hydroxide [25%]	None
Sulfuric Acid [96%]	None
Tricloro-s-triazenetrione	None
Trisodium Phosphate [40%]	None
Water [100%]	None
Xylene [100%]	None

### IN-STOCK COLOR INDEX

Available in both 40-S & 25-A Grades

By Item Number	By Color Name
Q1000 (Natural)	Apricot (Q1640)
Q1010 (White)	Ash (Q1310)
Q1015 (Eggshell)	Aspen (Q1150)
Q1020 (Black)	Beige (Q1220)
Q1110 (Blue)	Black (Q1020)
Q1115 (Cobalt)	Blue (Q1110)
Q1120 (Navy)	Blush (Q1630)
Q1130 (Slate)	Bordeaux (Q1650)
Q1140 (Teal)	Brown (Q1270)
Q1150 (Aspen)	Buff (Q1280)
Q1160 (Capri)	Butter (Q1215)
Q1210 (Ivory)	Cappuccino (Q1230)
Q1215 (Butter)	Capri (Q1160)
Q1220 (Beige)	Charcoal (Q1340)
Q1230 (Cappuccino)	Clover (Q1410)
Q1240 (Tan)	Cobalt (Q1115)
Q1250 (Taupe)	Conductive (Q9300)
Q1260 (Sienna)	Crimson (Q1620)
Q1270 (Brown)	Eggshell (Q1015)
Q1280 (Buff)	Flint (Q1350)
Q1290 (Toffee)	Ginger (Q1510)
Q1310 (Ash)	Gravel (Q1330)
Q1320 (Smoke)	Ivory (Q1210)
Q1330 (Gravel)	Lemongrass (Q1440)
Q1340 (Charcoal)	Loganberry (Q1820)
Q1350 (Flint)	Mustard (Q1720)
Q1410 (Clover)	Natural (Q1000)
Q1420 (Vineyard)	Navy (Q1120)
Q1430 (Rainforest)	Orange (Q1520)
Q1440 (Lemongrass)	Plum (Q1810)
Q1510 (Ginger)	Rainforest (Q1430)
Q1520 (Orange)	Red (Q1610)
Q1610 (Red)	Sienna (Q1260)
Q1620 (Crimson)	Slate (Q1130)
Q1630 (Blush)	Smoke (Q1320)
Q1640 (Apricot)	Tan (Q1240)
Q1650 (Bordeaux)	Taupe (Q1250)
Q1710 (Yellow)	Teal (Q1140)
Q1720 (Mustard)	Toffee (Q1290)
Q1810 (Plum)	Vineyard (Q1420)
Q1820 (Loganberry)	White (Q1010)
Q9300 (Conductive)	Yellow (Q1710)

#### By Color



### CUSTOM COLORS AVAILABLE



### APPLICATION

#### COVERAGE RATES

**Grade**      **Full Coverage / Double Broadcast**

40-S              ½ - 1 lb. per square foot

25-A              1 - 2 lbs. per square foot

\*Coverage rates vary depending on customer preferences and application techniques. Torginol does not guarantee exact coverage rates.

#### APPLICATION METHODS

- Resinous floor coating systems
- Broadcast systems
- Trowel applied slurry systems
- Screeded slurry systems
- Self-leveling systems

### SYSTEM COMPATIBILITY

#### Lab tested resin system compatibility:

- Epoxies
- Polyurethanes
- Polyureas
- Polyspartics
- MMAs
- Waterborne resins
- Solvent-based resins
- And others...

\*ColorGranules™ have been lab tested for compatibility with most commonly used resinous flooring systems. However, Torginol recommends unknown resin compatibility testing prior to use.

### PACKAGING

<b>Unit Packaging:</b>	50 lb. bags (22.68 kg) <i>Multi-wall kraft paper bags</i>
<b>Full Pallets:</b>	49 bags 2,450 lbs net weight 2,500 lbs gross weight 48"L x 40"W x 32"H
<b>Full Truckloads:</b>	833 bags / 17 pallets 41,650 lbs net weight 42,500 lbs gross weight
<b>Freight / Shipping:</b>	Class 50



### WARNING

This product contains crystalline silica / quartz, which can cause silicosis (an occupational lung disease) and lung cancer. For detailed information on the potential health effects of crystalline silica / quartz, see the Torginol, Inc. - ColorGranules™ Material Safety Data Sheet (MSDS).

### DISCLAIMER

The information set forth in this Product Data Sheet represents typical properties of the product described; the information and the typical values are not specifications. Torginol, Inc. makes no representation or warranty concerning the Products, expressed or implied by this Product Data Sheet.

### RECOMMENDED USES



- Animal Facilities
- Apartment Buildings
- Auto Dealerships
- Balconies
- Bars, Pubs & Taverns
- Banquet Halls
- Break Rooms
- Cafeterias
- Churches
- Clean Rooms
- Commercial Kitchens
- Control Rooms
- Corridors
- Countertops
- Detention Centers
- Dog Kennels
- Firehouses
- Food Processing Plants
- Garages
- Greenhouses
- Hallways
- Hospitals
- Hotels
- Industrial Facilities
- Laboratories
- Locker Rooms
- Municipalities
- Museums
- Nursing Homes
- Offices
- Patios
- Pharmaceutical Plants
- Pool Decks
- Prisons / Jails
- Production Floors
- Ramps
- Recreation Rooms
- Restaurants
- Restrooms
- Retail Stores
- Retirement Homes
- Salons
- Schools
- Shower Stalls
- Showrooms
- Stadiums
- Sunrooms
- Veterinary Clinics
- Walkways
- Workshops
- Zoos

